

Fan type T-200K and T-200D

Technical data

Motor: IP 55

Fan T-200K

Supplied with the following motors:

kW	amp.	Weight of motor kg
11,0	21,2	64
15,0	27,5	83
18,5	34,4	87
22,0	40,0	165

Fan T-200D

Supplied with the following motors:

kW	amp.	Weight of motor kg
11,0	21,2	69
15,0	27,5	83
18,5	34,4	87
22,0	39,0	180

Max. min⁻¹:

Standard impeller: 2.940 min.⁻¹

Reinforced impeller: 2.850 min.⁻¹

Operating range T-impeller:

Air volume: 800 - 5.200 m³/h

Pressure: 2.150 - 7.850 Pa

Power supply:

3 x 400 V - 50 Hz.

Construction T-200K:

B3 - motor mounted on foot.

Construction T-200D:

B35 - motor mounted with food and flange.


T-impeller:

No. of blades, standard: 8 pcs.



Diameter: ø650 mm

Height: 120 mm

Noise level and power input **T-impeller**

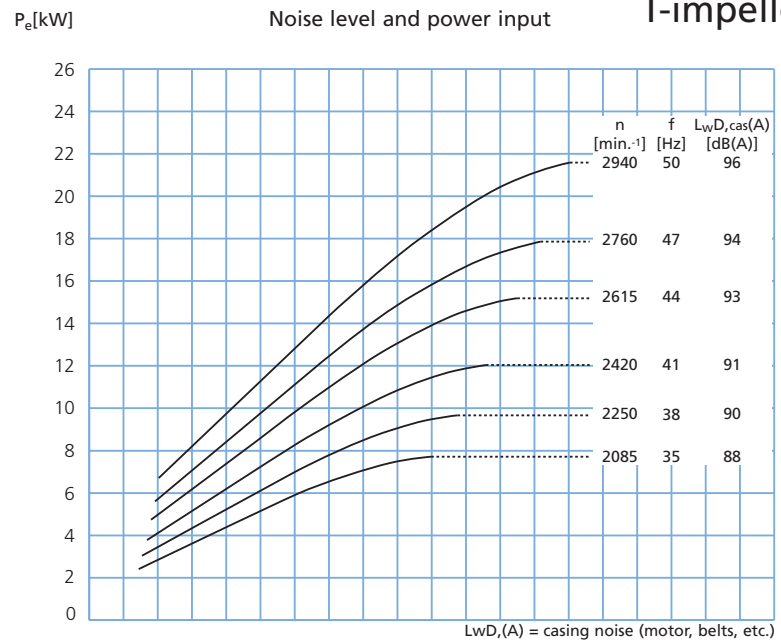

Useful effect and pressure

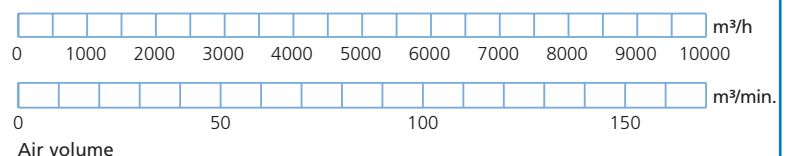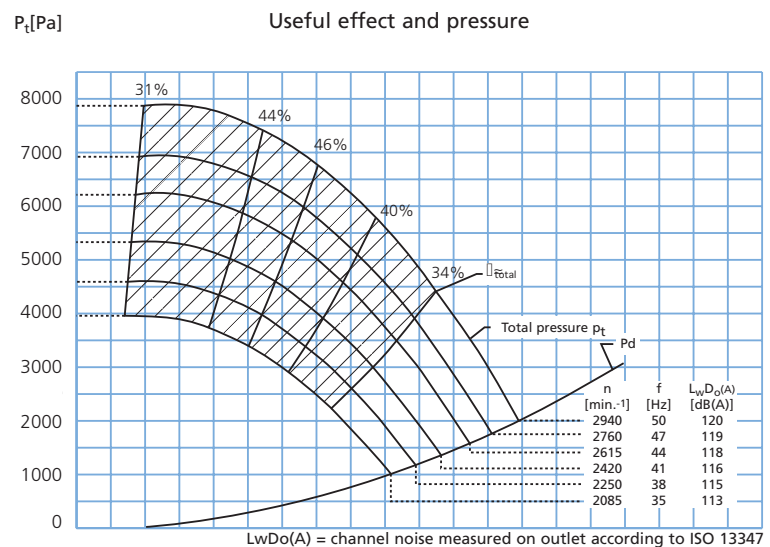

Fan type T-200K and T-200D

Technical data

Motor: IP 55

Fan T-200K

Supplied with the following motors::

kW	amp.	Weight of motor kg
11,0	21,2	64
15,0	27,5	83
18,5	34,4	87
22,0	40,0	165

Fan T-200D

Supplied with the following motors:

kW	amp.	Weight of motor kg
11,0	21,2	69
15,0	27,5	83
18,5	34,4	87
22,0	39,0	180

Max. min⁻¹:

Impeller: 2.940 min.⁻¹

Operating range P-impeller:

Air volume: 1.000 - 6.500 m³/h

Pressure: 1.850 - 8.350 Pa

Power supply:

3 x 400 V - 50 Hz.

Construction T-200K:

B3 - motor mounted on foot.

Construction T-200D:

B35 - motor mounted with food and flange.

P-impeller:

No. of blades, standard: 8 pcs.

Diameter: ø654 mm

Height: 131 mm

