

Fan type T-400K and T-400D

Technical data

Motor: IP 55

Fan T-400K

Supplied with the following motors:

kW	amp.	Weight of motor kg
37,0	65,9	305
45,0	78,0	328
55,0	95,4	452
75,0	129,0	592

Fan T-400T

Supplied with the following motors:

kW	amp.	Weight of motor kg
55,0	95,4	452
75,0	129,0	592

Max. min⁻¹:

Impeller: 2.955 min.⁻¹

Operating range T-impeller:

Air volume: 2.500 - 17.000 m³/h

Pressure: 3.500 - 11.700 Pa

Power supply:

3 x 400 V - 50 Hz.

Construction T-400K:

B3 - motor mounted on foot.

Construction T-400D:



B35 - motor mounted with food and flange.

T-impeller:

No. of blades, standard: 8 pcs.

Diameter: ø786 mm

Height: 199 mm

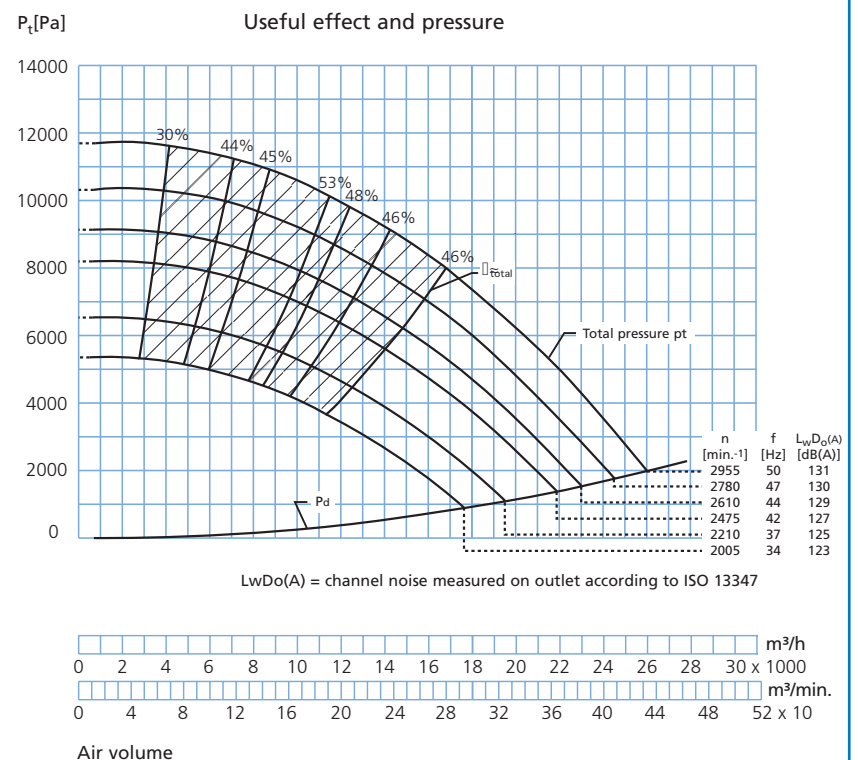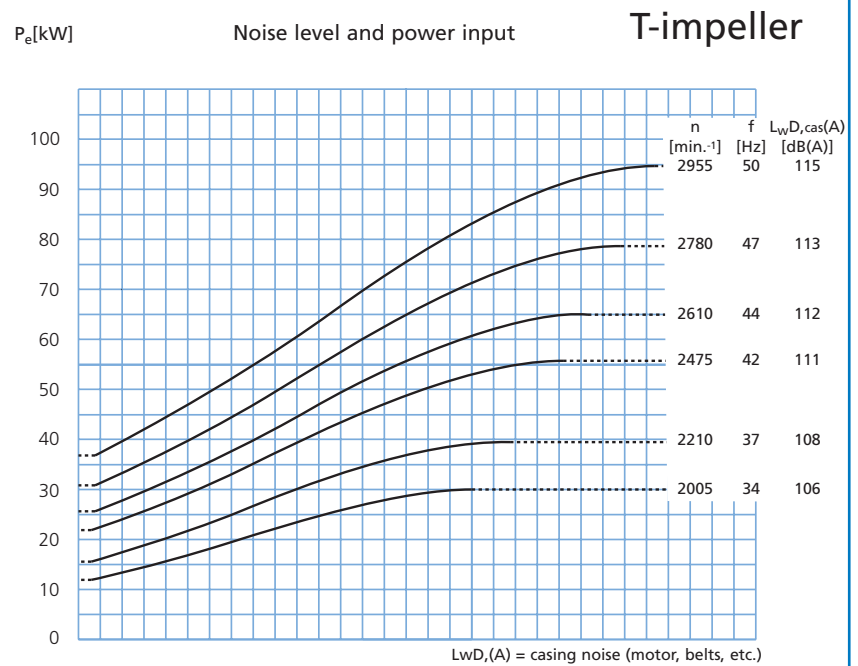

Fan type T-400K and T-400D

Technical data

Motor: IP 55

Fan T-400K

Supplied with the following motors:

kW	amp.	Weight of motor kg
37,0	65,9	305
45,0	78,0	328
55,0	95,4	452
75,0	129,0	592

Fan T-400D

Supplied with the following motors:

kW	amp.	Weight of motor kg
55,0	95,4	452
75,0	127,0	592

Max. min⁻¹:

Impeller: 2.955 min.⁻¹

Operating range P-impeller::

Air volume: 4.000 - 23.000 m³/h

Pressure: 2.200 - 11.000 Pa

Power supply:

3 x 400 V - 50 Hz.

Construction T-400K:

B3 - motor mounted on foot.

Construction T-400D:

B35 - motor mounted with food and flange.

P-impeller:

No. of blades, standard: 8 pcs.

Diameter: ø769 mm

Height: 240 mm

